


Technical data:

Explosion Protection	: Ex d IIB T4 /T6
Conforming to	: Standards IEC 60079-0/1 or UL 60079-1
Marking for test	: Ex II2G
Degree of Protection	: IP54/65 acc. To IEC 60529
Ambient Temp. (Ta)	: -20°C to + 55°C
Rated Voltage	: 220-240V. AC. 50/60H
Lamp holder	: E27
Connection	: L , N and E for 1-4Squmm. Cable
Mounting	: Ceiling , Pendant and Bracket
Protection class for UL.	: Class I, Division 1or 2 Group. C,D Class II, Division 1 or 2 Groups. E,F,G Class III
Protection class for IEC	: Zone1 , 21 and Zone 2 , 22

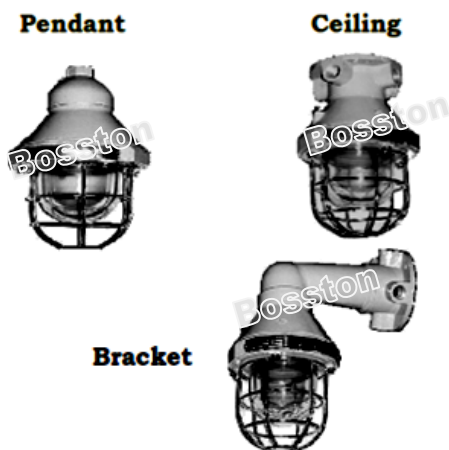

Specification:

Body and cover	: Marine grade copper-free aluminum alloy with epoxy-polyester powder coated , RAL7032 (GREY)
Glass globe	: Borosilicate glass
Basket guard	: Stainless steel
Sealing gasket	: Silicone -40°C to + 175°C


Options:

Adding suffix to Cat. No.
Aluminum external reflector Suffix - R


Catalogue Number and Dimension :

Catalogue Number		
Pendant	Ceiling	Bracket
ECNP	ECNC	ECNB

Ceiling mounting

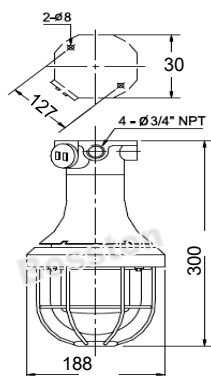

Pendant mounting



Bracket mounting

