Bosston
A QUALITY PRODUCT

Stopping Plug,
DSP, DSP2 Series

Technical data

Type fo protection	:	Ex d II C T6 (for Zone 1&2)
Conforming to	:	IEC60079-1
Marking	:	CE 0102 Ex II2G Exd IIC T6
Degree of prodection	:	IP 54 (without gasket) IP 66 (with gasket) acc.to IEC 60529
Ambient temp.(Ta)	:	-20° C to +75° C

Specification

DSP series	:	ISO9001:2008
DSP2 series	:	Copper-free aluminium alloy with epoxy-polyester powder coated.
Entry thread seal (option)	:	Thermoplastic elastomer or NBR rubber

Catalogue number

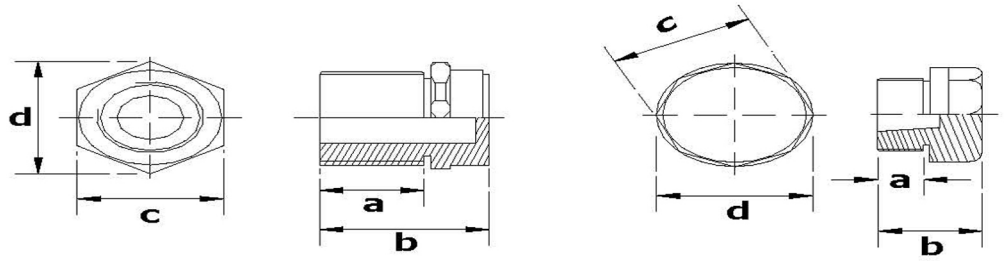

DSP Series

DSP2 Series

Cat.,No.	Entries Thread NPT (inch)	Dimensions a	b	c	d	Cat.,No.	Entries Thread NPT (inch)	Dimensions a	b	c	d
DSP-N1	1/2"	17	31	24	26.5	DSP2-N1	1/2"	11.8	27.3	28	31
DSP-N2	3/4"	17	31	31	34	DSP2-N2	3/4"	11.8	27.3	35	38
DSP-N3	1"	22	38	38	42	DSP3-N3	1"	16.5	33	41	45
DSP-N4	1.1/4"	22	38	51	56	DSP4-N4	1.1/4"	16.5	33	53	58
DSP-N5	1.1/2"	22	38	57	63	DSP5-N5	1.1/2"	16.5	33	58	62
DSP-N6	2"	22	38	70	77	DSP6-N6	2"	16.5	33	70	76
DSP-M16	M16 x 1.5	14	28	22	24.5	DSP2-M16	M16 x 1.5	11.8	27.3	28	31
DSP-M20	M20 x 1.5	14	28	24	26.5	DSP2-M20	M20 x 1.5	11.8	27.3	28	31
DSP-M25	M25 x 1.5	14	28	31	34	DSP2-M25	M25 x 1.5	11.8	27.3	35	38
DSP-M32	M32 x 1.5	14	30	38	42	DSP2-M32	M32 x 1.5	16.5	33	41	45
DSP-M40	M40 x 1.5	14	30	51	56	DSP2-M40	M40 x 1.5	16.5	33	53	58
DSP-M50	M50 x 1.5	14	30	57	63	DSP2-M50	M50 x 1.5	16.5	33	58	62
DSP-M63	M63 x 1.5	14	30	70	77	DSP2-M63	M63 x 1.5	16.5	33	70	76
DSP-M75	M75 x 1.5	14	30	76	84	DSP2-M75	M75 x 1.5	27	46	82	89
DSP-M90	M90 x 2.0	19	41	101	112	DSP2-M90	M90 x 2.0	27	46	98	103
DSP-M100	M100 x2.0	19	41	114	126	DSP2-M100	M100 x2.0	27	46	120	126